150292 Driver

40W Max Constant Current Redundancy Dimmable Driver

Scan to explore Trend online

Product Code	Dimming & Controls
150292	Leading & Trailing Edge

Order Code **150292-LT**

Driver Compliance

SELV

Product Attributes

L&T DIM | IP20 | NON IC

Product Features

- Constant current output
- Selectable output current via DIP switch (700mA/ 850mA/ 1000m)
- Supports leading and trailing edge dimming for a smooth dimming effect on supported constant current LED lights
- Seamless redundancy system: Automatically switches to a separate integrated backup driver if the primary driver fails
- Automatic power or self check. Maintains capacitor activity in the backup driver, ensuring the backup driver is in optimal condition, even in stand-by mode.
- Short circuit protection; Open circuit protection

Physical Characteristics

Driver Colour	White
Dimensions (LxWxH)	270 x 58 x 29 mm
Weight	303 g

Dimensions (mm)

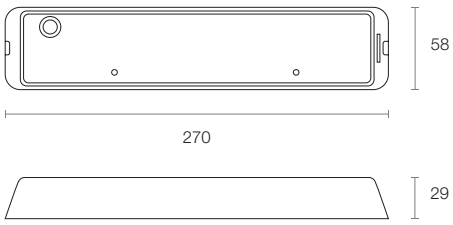

Output Parameters

Voltage	30-42V DC
Current	700mA | 850mA | 1000mA
Wattage	40W Max
Current Accuracy	±5%

Input Parameters

Voltage	220-240V AC 50/60 Hz
Current	0.4A Max*
Efficiency	85%
Power Factor	>0.90

* Inrush Current: Cold start, 10A @240V AC

General Characteristics

Dimming Mode	Leading and Trailing Edge
Protection	Short Circuit and Open Circuit Protection
Working Temperature	-20°C to 50°C
tc	85°C
Ingress Protection	IP20
Insulation Contact	Non-IC
Lifetime	100,000 hours

© Trend Lighting. Specifications are subject to change.

150292 Driver 40W Max Constant Current Redundancy Dimmable Driver

Input Voltage & Effiecncy Curve

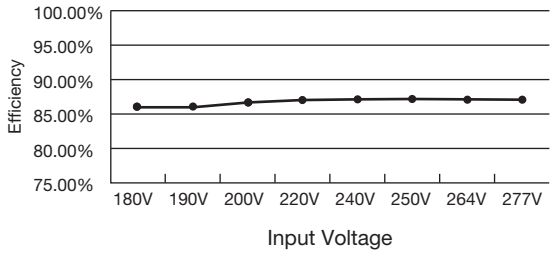

Input Voltage & PF Curve

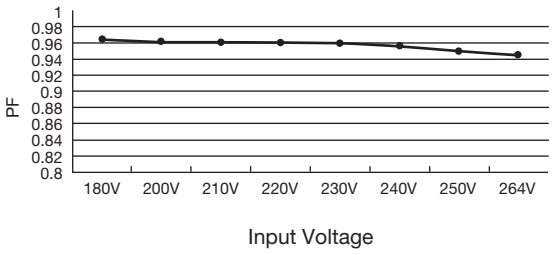

Dimming curve

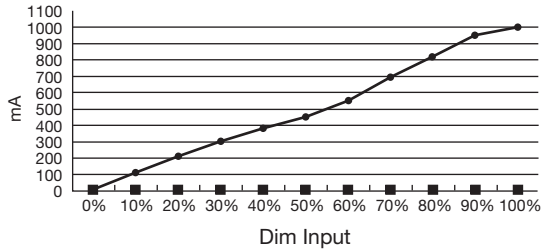

Lifespan & Environment Curve

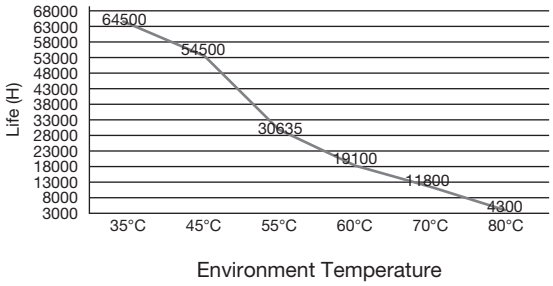

Cautions

1. The product must be installed by a licensed electrician.
2. This product is not waterproof. When used for exterior lighting application, please ensure that the driver is not subject to water ingress.
3. Good heat dissipation will prolong the working life of the LED Driver. Ensure the driver is mounted in a location with adequate ventilation.
4. Ensure the output voltage and current of the driver meets the requirements of the LED they are powering.
5. This product is not user serviceable. If a fault occurs, return the driver to your supplier.

The contents of this manual may be updated without prior notice.
If you are uncertain about any of the driver specifications or instructions,
please contact Trend Lighting for the most up-to-date copy of this document.

© Trend Lighting. Specifications are subject to change.