150235 Driver

150W 24V Constant Voltage Dimmable Driver

Scan to explore Trend online

Product Code	Dimming & Controls
150235	DALI | 1-10V

Order Code **150235**

Driver Compliance

SELV

Product Attributes

DC 24V | DALI DIM | 1-10 DIM | IP20 | NON IC

Product Features

- Single channel constant voltage output 24V DC
- Supports DALI, 1-10V, active signal, adjustable resistance, PWM, and Touch DIM for a smooth dimming effect on supported 24V constant voltage lights
- Short circuit protection (SCP); Over voltage protection (OVP); Over current protection (OCP)
- Flicker Free

Physical Characteristics

Driver Colour	White
Dimensions (LxWxH)	360 x 30 x 21 mm
Weight	338 g

Dimensions (mm)

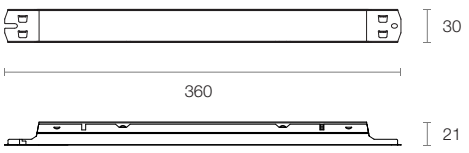

Output Parameters

Voltage	24V DC
Current	6.25A
Wattage	150W
Voltage Accuracy	±5%

Input Parameters

Voltage	220-265V AC 50/60Hz
Current	0.75A Max*
Efficiency	92%
Power Factor	>0.95

* Inrush Current: Cold start, 50A @240V AC

General Characteristics

Dimming Mode	DALI | 1-10V
Protection	SCP, OVP, OCP
Working Temperature	-20°C to 50°C
tc	80°C
Ingress Protection	IP20
Insulation Contact	Non-IC
Lifetime	50,000 hours

© Trend Lighting. Specifications are subject to change.

150235 Driver 150W 24V Constant Voltage Dimmable Driver

Wiring Diagram

DALI

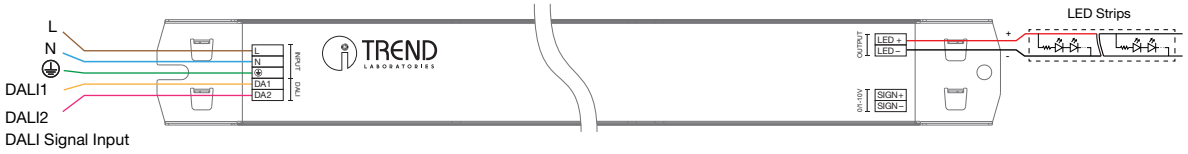

0/1-10V

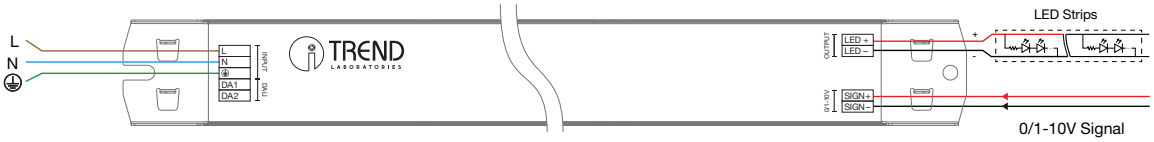

DALI Diagram

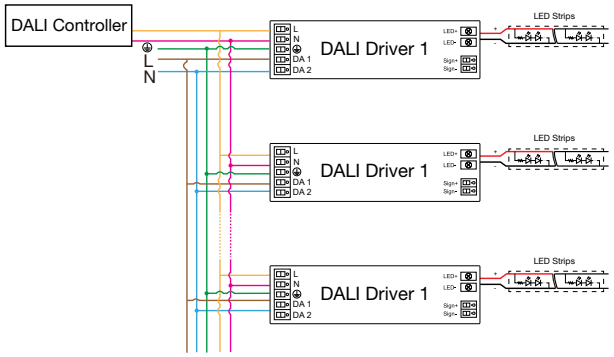

Touch DIM Diagram *

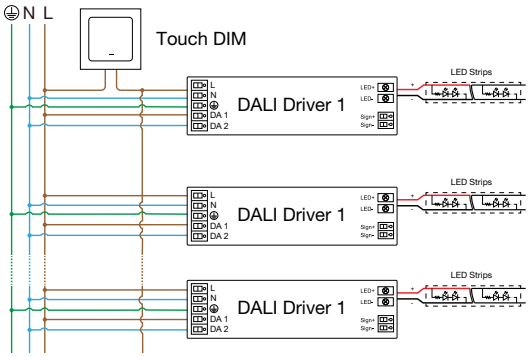

* Note: Only use open push button without indicator light. Maximum cable length between each unit: 20 meters.

Touch DIM Function

1. Press the Touch DIM (Push DIM) switch for 8s or more,the driver can be controlled via Push DIM switch.
2. Short press the Touch DIM (Push DIM) switch (<0.5s) to control the lamp on or off.
3. Long press the Touch DIM (Push DIM) switch (>0.5s) to dim the brightness of light.
   The dimming direction will change every time after pressing switch.
4. Double-click the Touch DIM (Push DIM) switch (<0.3s), then all lamps connected on the device will be set maximum brightness.
5. The brightness adjustment range is 1%-100%, and the light can be turned off through short pressing when doing the adjustment with long pressing Push DIM switch.
6. With the Power off memory function, the power-down state will be recovered when power on again.

© Trend Lighting. Specifications are subject to change.

150235 Driver 150W 24V Constant Voltage Dimmable Driver

DALI Curve

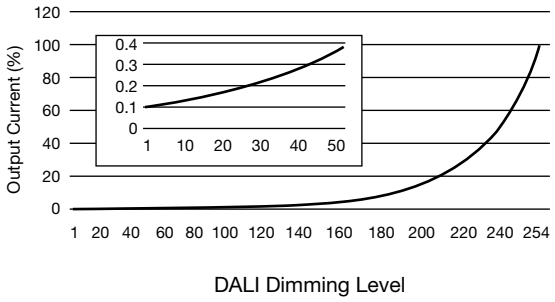

0/1-10V Curve

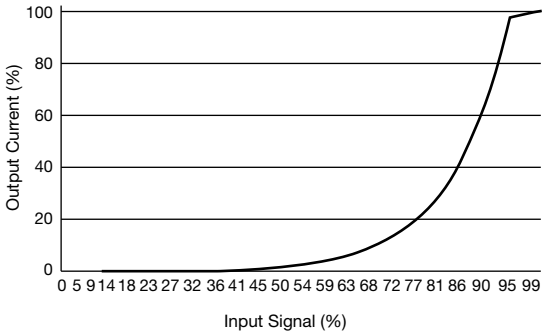

Cautions

1. The product must be installed by a licensed electrician.
2. DALI and Touch DIM functions cannot be used simultaneously.
3. This product is not waterproof. When used for exterior lighting application, please ensure that the driver is not subject to water ingress.
4. Good heat dissipation will prolong the working life of the LED Driver. Ensure the driver is mounted in a location with adequate ventilation.
5. Ensure the output voltage and current of the driver meets the requirements of the LED they are powering.
6. This product is not user serviceable. If a fault occurs, return the driver to your supplier.

The contents of this manual may be updated without prior notice.
If you are uncertain about any of the driver specifications or instructions,
please contact Trend Lighting for the most up-to-date copy of this document.

© Trend Lighting. Specifications are subject to change.